





Summit
S0808EH

ELECTRIC SCISSOR LIFTS

Summit

S0808EH

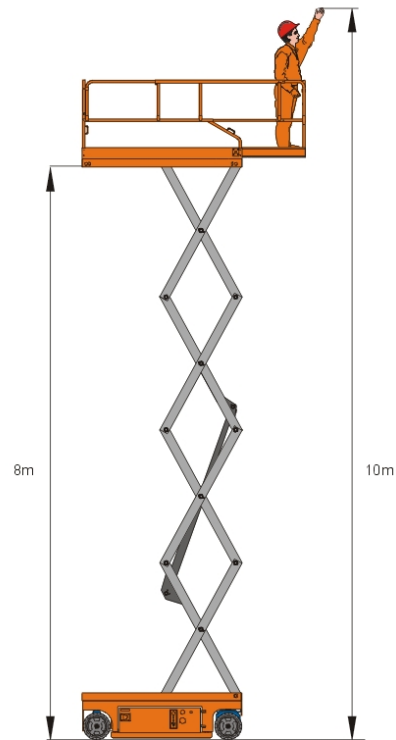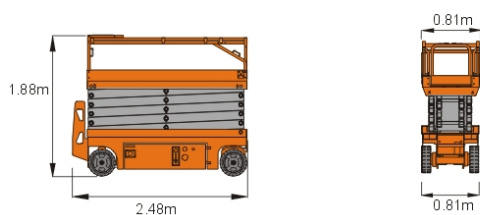

| | |
|------------------------|-------------|
| S.W.L | 230kg/507lb |
| S.W.L on extension | 113kg/249lb |
| Maximum workers number | 2 |



| | |
|----------------------|--------------------|
| Travel speed(Stowed) | 3.5km/h 2miles/h |
| Travel speed(Raised) | 0.8km/h 0.5miles/h |
| Up/Down speed | 22 / 40 sec |



| | |
|-----------------------|---------------|
| Working height | 10.0m/32ft9in |
| Platform floor height | 8.0m/26ft3in |



| | |
|--------------------|--------------|
| Batteries | 4X6 V/210 Ah |
| Integrated charger | 24V/ 25 A |



| | |
|----------------------------|---------------------------|
| Overall length | 2.48m/8ft1in |
| Overall width | 0.81m/2ft7in |
| Overall height(Rails up) | 2.34m/7ft8in |
| Overall height(Rails down) | 1.88m/6ft2in |
| Platform size | 2.27X0.81m/7ft5inX/2ft7in |
| Platform extension size | 0.9m/2ft11in |
| Ground clearance(Stowed) | 0.1m/4in |
| Ground clearance(Raised) | 0.019m/1in |
| Wheelbase | 1.87m/6ft1in |
| Turning radius(Inside) | 0m |
| Turning radius(Outside) | 2.19m/7ft2in |



| | |
|-----------------------|---------|
| Gradeability | 25% |
| Maximum working slope | 2 - 3 ° |



| | |
|-------|------------|
| Tyres | Φ381X127mm |
|-------|------------|



| | |
|--------|---------------|
| Weight | 2100kg/4630lb |
|--------|---------------|



| | |
|---------------|---------|
| Lifting motor | 24V/3kw |
|---------------|---------|

Standard equipment

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- 2WD
- Automatic brakes
- Emergency lowering system
- Emergency stop buttons
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection
- AC power to the platform
- Flashing beacon

Options

- Platform work lights
- Airline to the platform

