

 **Dingli Australia**  
[www.dingliaustralia.com.au](http://www.dingliaustralia.com.au)





**Summit**  
**S0812EH**

## ELECTRIC SCISSOR LIFTS

# Summit

## S0812EH

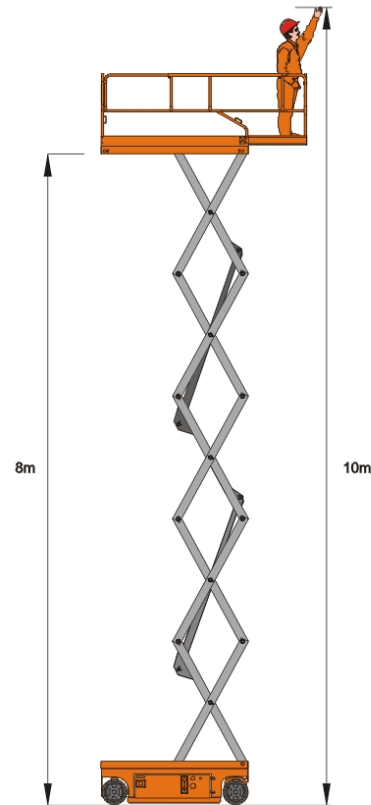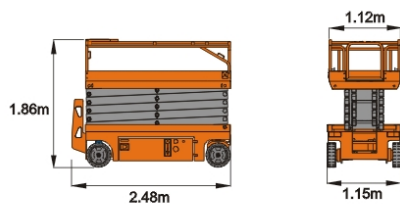

|                        |             |
|------------------------|-------------|
| S.W.L                  | 450kg/992lb |
| S.W.L on extension     | 113kg/249lb |
| Maximum workers number | 2           |



|                       |               |
|-----------------------|---------------|
| Working height        | 10.0m/32ft9in |
| Platform floor height | 8.00m/26ft3in |



|                            |                           |
|----------------------------|---------------------------|
| Overall length             | 2.48m/8ft1in              |
| Overall width              | 1.15m/3ft9in              |
| Overall height(Rails up)   | 2.34m/7ft8in              |
| Overall height(Rails down) | 1.88m/6ft2in              |
| Platform size              | 2.27X1.12m/7ft5inX/3ft8in |
| Platform extension size    | 0.9m/2ft11in              |
| Ground clearance(Stowed)   | 0.1m/4in                  |
| Ground clearance(Raised)   | 0.019m/1in                |
| Wheelbase                  | 1.87m/6ft1in              |
| Turning radius(Inside)     | 0m                        |
| Turning radius(Outside)    | 2.33m/7ft7in              |



|               |         |
|---------------|---------|
| Lifting motor | 24V/3kw |
|---------------|---------|



|                      |                    |
|----------------------|--------------------|
| Travel speed(Stowed) | 3.5km/h 2miles/h   |
| Travel speed(Raised) | 0.8km/h 0.5miles/h |
| Up/Down speed        | 30 / 33sec         |



|                    |              |
|--------------------|--------------|
| Batteries          | 4X6 V/210 Ah |
| Integrated charger | 24V/ 25 A    |



|                       |         |
|-----------------------|---------|
| Gradeability          | 25%     |
| Maximum working slope | 2 - 3 ° |



|       |            |
|-------|------------|
| Tyres | Φ381X127mm |
|-------|------------|



|        |               |
|--------|---------------|
| Weight | 2300kg/5070lb |
|--------|---------------|

### Standard equipment

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- 2WD
- Automatic brakes
- Emergency lowering system
- Emergency stop buttons
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection
- AC power to the platform
- Flashing beacon

### Options

- Platform work lights
- Airline to the platform

