



MC305-2 CRM(E) Mini Crane

The MC305-2 is the first of the “ride on” Maeda mini cranes and is extremely powerful for its small stature. Up to 2.98 tons of lifting power from a machine only 1280mm wide. The superior quality and engineering of the Maeda product line gives longevity of use and higher return on rental investments are enjoyed by end users across the board.



Features at a glance...

- 2.98 Ton Lifting Capacity
- 12.52m Max Lifting Height
- Energy Saving System
- Sheaves Protected Inside Boom
- Variable (Hi/Lo) Travel Speeds
- Programmable Moment Limiter
- Hydrostatic Transmission
- Centralized Controls
- 4 Fall / 2 Fall Hook Block
- Automatic Hook Stowage System
- Tilt Sensor/Alarm
- Powerful Two Speed Winch
- Hydraulic Disc Brake
- Remote Control
- Outrigger Interlock System
- 2 Year Warranty

More Images...



Glazing



Uneven Ground



Installations



Steel Erecting




General Lifting

... consider the possibilities



Specifications	
Capacity	Maximum 2.98 t x 2.5m
Working Radius	Maximum 12.16m x 260kg
Lifting Height	Maximum 12.52m x 790kg
Dimensions	MC305 CRM(E) 4285mm x 1280mm x 1695mm
Weight	MC305 CRM 3900kg MC305 CRME 4040kg
Hook Speed	Maximum 13.5m / min. (4 falls, 4th layer)
Single Line Speed	Maximum 54m / min. (4th layer)
Hoist Rope	Type IWRC 6 x WS (26) Ø 8mm x 73m
Telescopic System	Boom length 3.695m - 12.485m Telescoping speed 8.79m / 38 sec (26 sec) Boom type Fully automatic 5 section pentagonal telescopic boom
Boom Hoist System	Hoist angle / speed 0° - 80° / 21 sec. (14.5 sec)
Slew System	Slew angle / speed 360° continuous / 2.4 rpm (1.7 rpm)
Outrigger System	Type Extension and set-up by hydraulic cylinders. Maximum extended dimensions (Length) 4888mm x (Front) 4504mm x (Rear) 4396mm
Traction System	Drive Hydraulic motor driven, stepless speed changer Travel speed 0 - 2.8 km/h (1.3 km/h) Gradability 23° Ground length x width 1750mm x 300mm (Track dimensions) Ground pressure 0.37 kgf / cm ² (0.38 kgf / cm ² CRME)
Engine	Model Yanmar 3TNV76 Type 3 cylinder water cooled diesel Rated output 16.2 Kw / 2500 rpm Starting method Electric Fuel tank capacity Diesel / 40L
Electric Motor (Optional)	Type Fully enclosed fan cooled motor Size 5.5 Kw 4P 380V
Standard Equipment	Overwind protection, hydraulic safety valves, wire rope latch, level, machine body inclination alarm, EMO switch, travel lock lever, outrigger interlock device, moment limiter, working status lamp, hour-meter, 4-fall / 2-fall hook block, black rubber tracks and cable remote control.
Optional Equipment	Radio remote control, white rubber tracks, single fall hook, searcher hook.

Maximum Reach Below Ground Level		
Four Fall	Two Fall	Single Fall
16.09m	32.18m	64.36m

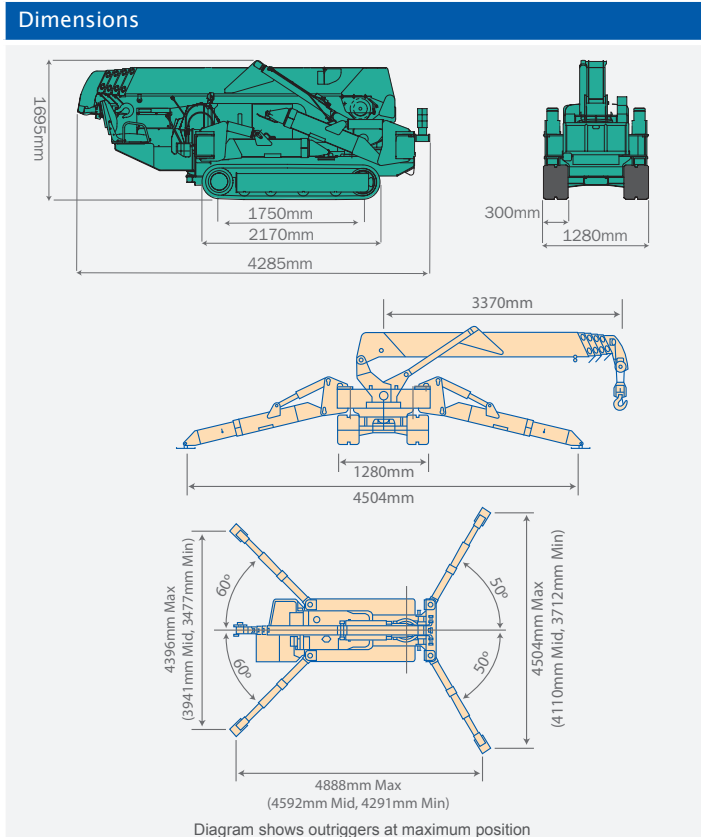

Total rated load Outriggers at Maximum position							
3.7m/5.945m boom		8.145m boom		10.315m boom		12.485m boom	
Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)
< 2.5	2980	2.7	2270	4	1080	< 4.5	790
3	2390	3	2120	4.5	985	5	660
3.5	1990	3.5	1680	5	880	6	520
4	1710	4	1440	6	770	7	430
4.5	1490	4.5	1260	7	670	8	380
5	1340	5	1110	8	570	9	340
5.62	1160	5.5	990	9	500	10	310
		6	880	9.99	435	11	280
		7	730			12.16	260
		7.82	630				

Total rated load Outriggers at Middle position							
3.7m/5.945m boom		8.145m boom		10.315m boom		12.485m boom	
Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)
< 2.5	2980	2.7	2270	4	1060	< 4.5	780
3	2360	3	2090	4.5	950	5	650
3.5	1960	3.5	1680	5	860	6	500
4	1680	4	1420	6	750	7	410
4.5	1380	4.5	1240	7	630	8	360
5	1140	5	1070	8	490	9	320
5.62	950	5.5	950	9	410	10	290
		6	800	9.99	350	11	260
		7	610			12.16	250
		7.82	520				

Total rated load Outriggers at Minimum position							
3.7m/5.945m boom		8.145m boom		10.315m boom		12.485m boom	
Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)	Working radius (m)	Total rated load (kg)
< 2.5	2980	2.7	2270	4	1060	< 4.5	780
3	2350	3	2090	4.5	950	5	650
3.5	1800	3.5	1680	5	860	6	500
4	1430	4	1370	6	680	7	410
4.5	1140	4.5	1120	7	530	8	360
5	950	5	910	8	420	9	320
5.62	790	5.5	790	9	340	10	290
		6	670	9.99	300	11	240
		7	510			12.16	210
		7.82	430				

