



www.dingliaustralia.com.au





E-Tech

S06-E

ELECTRIC SCISSOR LIFTS

E-Tech

S06-E

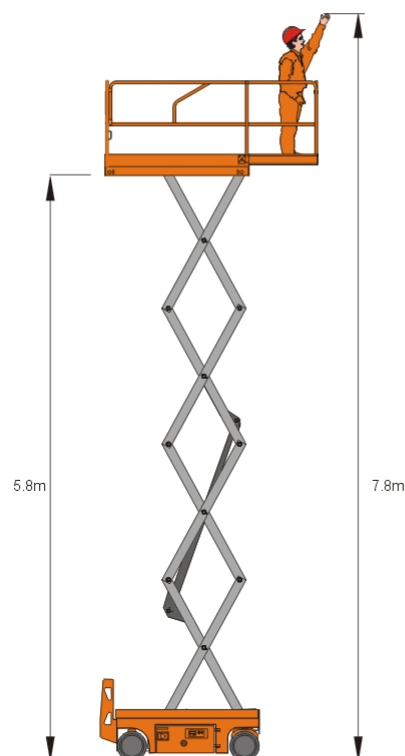

S.W.L	230kg/507lb
S.W.L on extension	113kg/249lb
Maximum workers number	2



Travel speed(Stowed)	5km/h 2miles/h
Travel speed(Raised)	0.8km/h 0.5miles/h
Up/Down speed	31 / 37 sec



Working height	7.8m/25ft7in
Platform floor height	5.8m/19ft



Batteries	4X6V/210 Ah
Integrated charger	24V/ 30 A



Overall length	1.86m/6ft1in
Overall width	0.76m/2ft6in
Overall height(Rails up)	2.16m/7ft1in
Overall height(Rails down)	1.84m/6ft
Platform size	1.67X0.74m/5ft7inX2ft5in
Platform extension size	0.9m/2ft11in
Ground clearance(Stowed)	0.09m/4in
Ground clearance(Raised)	0.019m/1in
Wheelbase	1.38m/4ft6in
Turning radius(Inside)	0m
Turning radius(Outside)	1.64m/5ft4in



Gradeability	25%
Maximum working slope	2 - 3 °



Tyres	Φ 305X100mm
-------	-------------



Weight	1240kg/2733lb
--------	---------------



Drive motors	24V/0.5kw
Lifting motor	24V/3kw

Standard equipment

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- 2WD
- Automatic brakes
- Emergency lowering system
- Emergency stop buttons
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All Motion Alarm

- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection
- AC power to the platform
- Flashing beacon

Options

- Platform work lights
- Airline to the platform

