

 **Dingli Australia**

[www.dingliaustralia.com.au](http://www.dingliaustralia.com.au)





**Summit**  
**S0608EH**

## ELECTRIC SCISSOR LIFTS

# Summit

## S0608EH

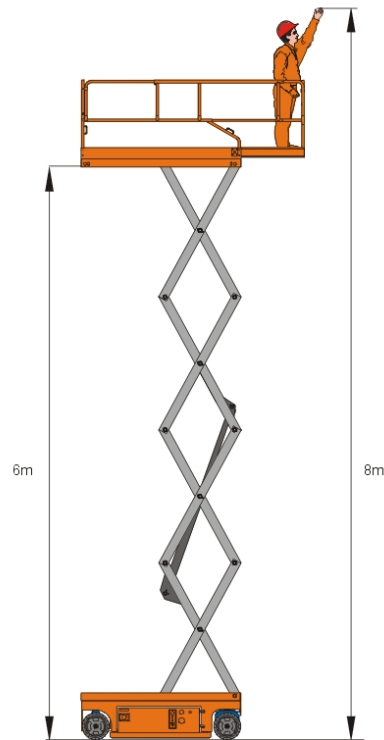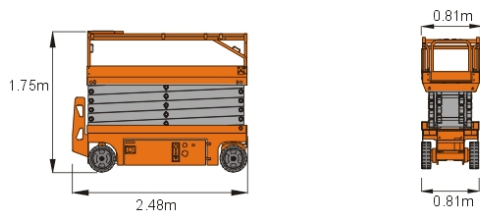

S.W.L	380kg/838lb
S.W.L on extension	113kg/249lb
Maximum workers number	2



Working height	8.0m/26ft3in
Platform floor height	6.0m/19ft8in



Overall length	2.48m/8ft1in
Overall width	0.81m/2ft7in
Overall height(Rails up)	2.21m/7ft3in
Overall height(Rails down)	1.75m/5ft8in
Platform size	2.27X0.81m/7ft5inX/2ft7in
Platform extension size	0.9m/2ft11in
Ground clearance(Stowed)	0.1m/4in
Ground clearance(Raised)	0.019m/1in
Wheelbase	1.87m/6ft1in
Turning radius(Inside)	0m
Turning radius(Outside)	2.19m/7ft2in



Lifting motor	24V/3kw
---------------	---------



Travel speed(Stowed)	3.5km/h 2miles/h
Travel speed(Raised)	0.8km/h 0.5miles/h
Up/Down speed	22 / 34 sec



Batteries	4X6 V/210 Ah
Integrated charger	24V/ 25 A



Gradeability	25%
Maximum working slope	2 - 3 °



Tyres	Φ381X127mm
-------	------------



Weight	1950kg/4299lb
--------	---------------

### Standard equipment

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- 2WD
- Automatic brakes
- Emergency lowering system
- Emergency stop buttons
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection
- AC power to the platform
- Flashing beacon

### Options

- Platform work lights
- Airline to the platform

